



EXPANDABLE CONTAINER OFFICE

USER-APPROVED SIX-SIZE FAMILY

General arrangements · corrugated-MS image standard ·
deployment diagrams · workbook-controlled budgetary prices

10×20 FT

EX-10X20-COMPACT-DRY-OFFICE-V1

20×20 FT

EX-20X20-MANAGER-MEETING-SIX-V1

30×20 FT

EX-30X20-MANAGER-CONFERENCE-EIGHT-SERVICE-V1

40×20 FT

EX-40X20-CORPORATE-EIGHT-DUAL-SERVICE-V1

40×40 FT

EX-40X40-CORPORATE-TWENTYFOUR-SERVICE-V1

60×20 FT

EX-60X20-CORPORATE-EIGHTEEN-SERVICE-V1

Technical specification and price dashboard companion · prices include 18% GST where stated



Approved options and budgetary prices

SIZE	AREA	WORKSTATIONS	EXT DOORS	WINDOWS	RATE / SQ.FT.	EX GST	INCL. 18% GST	STATUS
10×20	200	3 + reception	1	3	₹1,875	₹375,000	₹442,500	USER-APPROVED-GA
20×20	400	6 + reception	1	7	₹1,781.25	₹712,500	₹840,750	USER-APPROVED-GA
30×20	600	8 + reception	2	8	₹1,743.75	₹1,046,250	₹1,234,575	USER-APPROVED-GA
40×20	800	8 + reception	2	10	₹1,706.25	₹1,365,000	₹1,610,700	USER-APPROVED-GA
40×40	1,600	24 + reception	2	12	₹1,687.50	₹2,700,000	₹3,186,000	USER-APPROVED-GA
60×20	1,200	18 + reception	3	14	₹1,687.50	₹2,025,000	₹2,389,500	USER-APPROVED-GA

PRICE BASIS

Reference base rate ₹1,875/sq.ft. at 200 sq.ft.; retained workbook size-band multipliers; rate applied to deployed floor area. Prices are budgetary mechanism-inclusive planning estimates. Final quotation governs.

Product identity and buyer-use boundary

- Expandable office container with central chassis, fold-out floor wings, hinge/lock interfaces, weather seals and adjustable deployed supports.
- Folded transport condition and deployed office condition are separate engineering states.
- Exterior website imagery uses clearly visible vertical corrugated MS—not smooth or plain wall panels.
- Furniture and presentation fit-out illustrate the approved office program but remain quotation-controlled.

SAMAN

PORTABLE INFRASTRUCTURE

EXPANDABLE CONTAINER OFFICE

10' × 20' DEPLOYED · ARCHITECTURAL GENERAL ARRANGEMENT

USER-APPROVED-GA

EX-10X20-COMPACT-DRY-OFFICE-V1

DIMENSIONED DEPLOYED FLOOR PLAN · ONE COORDINATED MODEL

DESIGN CONTROL / CAPACITY / PRICE

10×20

DEPLOYED FT

200

SG.FT.

3

WORKSTATIONS

1/3

EXT DOORS / WINDOWS

FUNCTIONAL PROGRAM

- Dry office; no sanitary room
- 3 workstations + reception task seat
- 4-seat collaboration table
- Pantry and print/file storage

OPENING LEDGER · EXACT ORDER / COORDINATES

WALL A: D1 3.5-6.5

WALL B: W3 3-7

END C: W1 2-6 · W2 14-18

END D: SOLID · NO EXTERNAL DOOR / WINDOW

EXPANDABLE-SYSTEM CONTROL

- 20-ft width: 6-ft wing + 8-ft central chassis + 6-ft wing datums.
- 40×40: two 40×20 planning modules joined at y=20 ft.
- Low-profile flat container roof envelope; no gable / hip / cabin slope.
- Furniture clears opening swings and is loose unless quotation says otherwise.
- Folded envelope, hinges, locks, supports and seals: engineering/shop drawing.

WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 200 sq.ft.

Adjusted rate: ₹1,875.00/sq.ft.

Cabin price ex GST: ₹375,000

Final price incl 18% GST: ₹442,500

APPROVAL / ENGINEERING BOUNDARY

USER-APPROVED-GA: exact option approved for controlled asset production.

Architectural GA only · not for construction or fabrication.

No structural, lifting, stacking, fire, egress or accessibility claim.

Furniture, sanitary and MEP are excluded unless expressly quoted.

Final mechanism, supports, foundations and services require engineering.

ALL FOUR WALL ELEVATIONS · SAME OPENING LEDGER · FLAT ROOF ENVELOPE

WALL A

END C

WALL B

END D

Colour reference: Deep Oxford Blue exterior · Warm Ivory interior · appearance only; final finish follows quotation.

Ruleset 1.0.23 · Source: expandable-container-office-six-size-family.mxd · workbook · user-approved GA

23 AUG 2026 · V1

Architectural / commercial support document · approved GA governs geometry · final project engineering and quotation govern fabrication and supply.

23 AUG 2026 · V1

SAMAN


PORTABLE INFRASTRUCTURE

EXPANDABLE CONTAINER OFFICE

20' × 20' DEPLOYED · ARCHITECTURAL GENERAL ARRANGEMENT

USER-APPROVED-GA
EX-20X20-MANAGER-MEETING-SIX-V1

DIMENSIONED DEPLOYED FLOOR PLAN · ONE COORDINATED MODEL

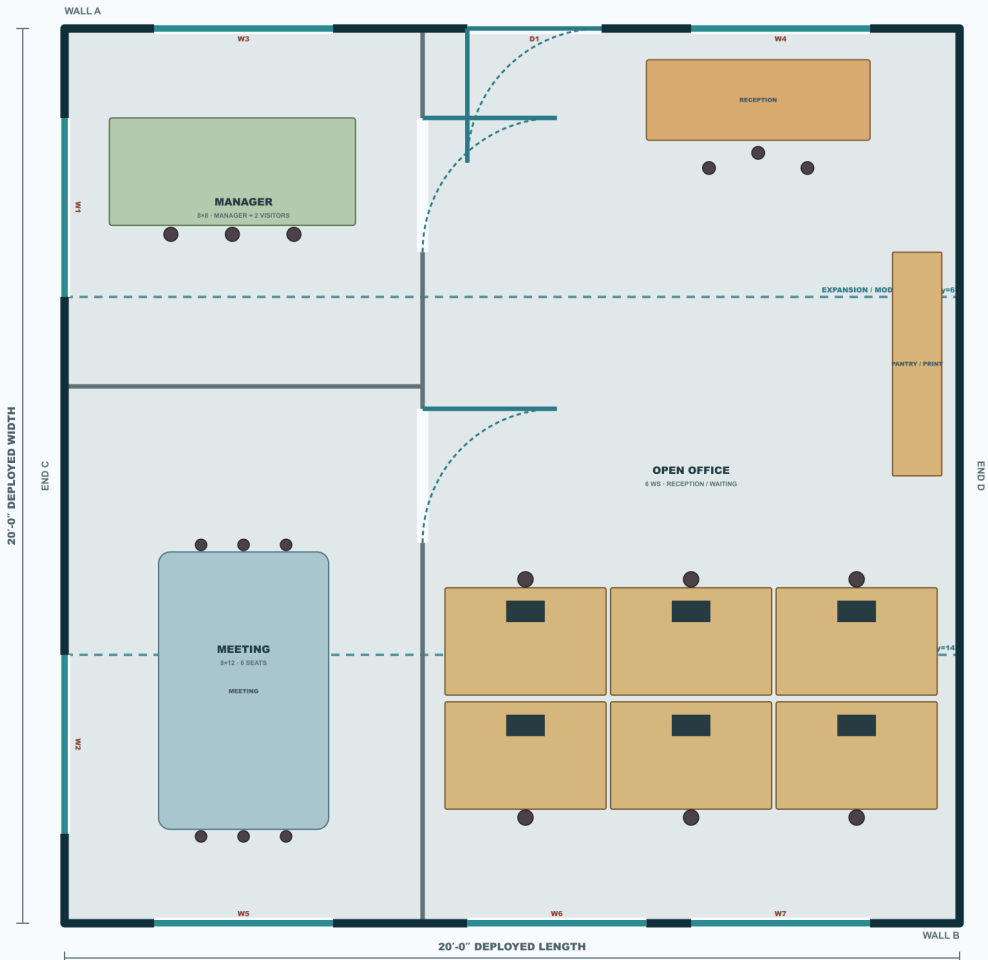

DESIGN CONTROL / CAPACITY / PRICE

20×20 DEPLOYED FT	400 SQ.FT.
6 WORKSTATIONS	1/7 EXT DOORS / WINDOWS

FUNCTIONAL PROGRAM

- 8×8 manager cabin
- 8×12 six-seat meeting room
- 6 workstations; 3 facing 3
- Reception/waiting + pantry/print

OPENING LEDGER · EXACT ORDER / COORDINATES

WALL A: W3 2-6 · D1 9-12 · W4 14-18
WALL B: W5 2-6 · W6 9-13 · W7 14-18
END C: W1 2-6 · W2 14-18
END D: SOLID · NO EXTERNAL DOOR / WINDOW

EXPANDABLE-SYSTEM CONTROL

- 20-ft width: 6-ft wing + 8-ft central chassis + 6-ft wing datums.
- 40×40: two 40×20 planning modules joined at y=20 ft.
- Low-profile flat container roof envelope; no gable / hip / cabin slope.
- Furniture clears opening swings and is loose unless quotation says otherwise.
- Folded envelope, hinges, locks, supports and seals: engineering/shop drawing.



WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 400 sq.ft.
Adjusted rate: ₹1,781.25/sq.ft.
Cabin price ex GST: ₹712,500
Final price incl 18% GST: ₹840,750

APPROVAL / ENGINEERING BOUNDARY

USER-APPROVED-GA: exact option approved for controlled asset production.
Architectural GA only · not for construction or fabrication.
No structural, lifting, stacking, fire, egress or accessibility claim.
Furniture, sanitary and MEP are excluded unless expressly quoted.
Final mechanism, supports, foundations and services require engineering.

ALL FOUR WALL ELEVATIONS · SAME OPENING LEDGER · FLAT ROOF ENVELOPE

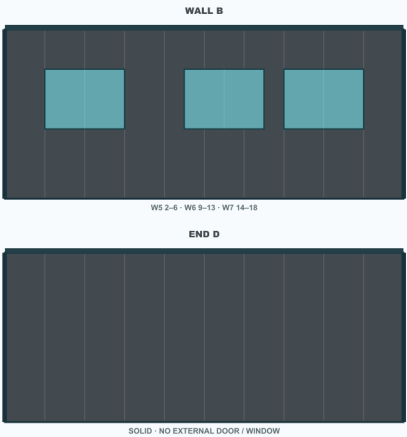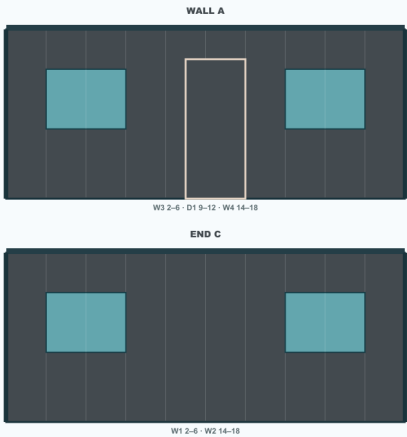

Colour reference: Graphite Charcoal exterior · Mist Blue-Grey interior · appearance only; final finish follows quotation.

SAMAN


PORTABLE INFRASTRUCTURE

EXPANDABLE CONTAINER OFFICE

30' × 20' DEPLOYED · ARCHITECTURAL GENERAL ARRANGEMENT

USER-APPROVED-GA
EX-30X20-MANAGER-CONFERENCE-EIGHT-SERVICE-V1

DIMENSIONED DEPLOYED FLOOR PLAN · ONE COORDINATED MODEL

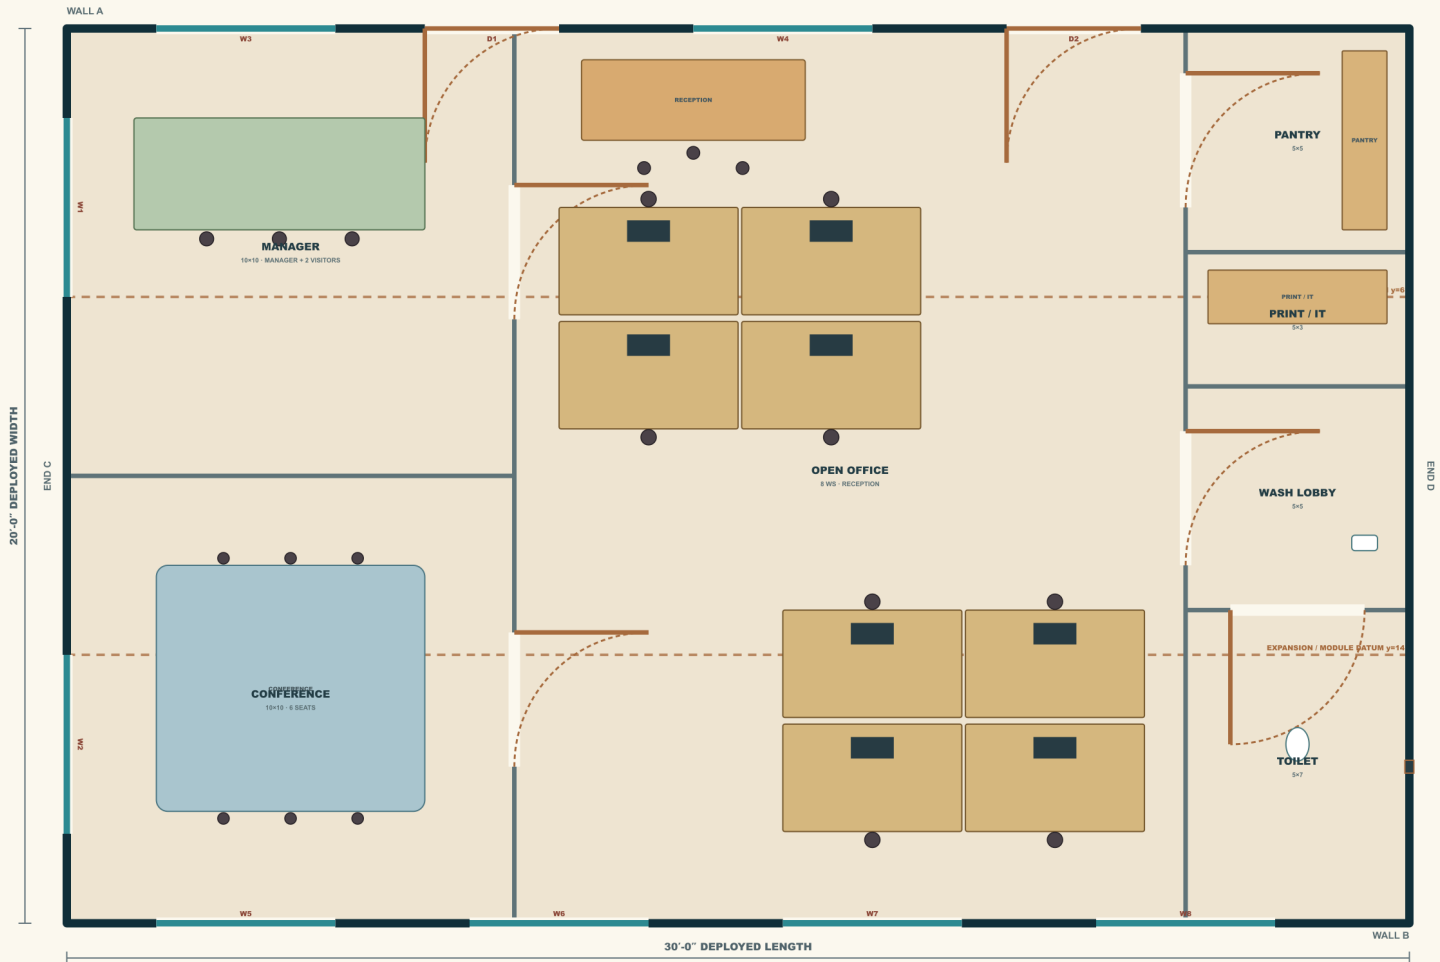

DESIGN CONTROL / CAPACITY / PRICE

30×20 DEPLOYED FT	600 SQ.FT.
8 WORKSTATIONS	2/8 EXT DOORS / WINDOWS

FUNCTIONAL PROGRAM

- 10x10 manager + 6-seat conference
- 8 workstations in two 4-seat islands
- Pantry + print/IT
- Wash lobby → one toilet privacy sequence

OPENING LEDGER · EXACT ORDER / COORDINATES

WALL A: W3 2-6 · D1 8-11 · W4 14-18 · D2 21-24
WALL B: W5 2-6 · W6 9-13 · W7 16-20 · W8 23-27
END C: W1 2-6 · W2 14-18
END D: EF/L-1

EXPANDABLE-SYSTEM CONTROL

- 20-ft width: 6-ft wing + 8-ft central chassis + 6-ft wing datums.
- 40x40: two 40x20 planning modules joined at y=20 ft.
- Low-profile flat container roof envelope; no gable / hip / cabin slope.
- Furniture clears opening swings and is loose unless quotation says otherwise.
- Folded envelope, hinges, locks, supports and seals: engineering/shop drawing.



WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 600 sq.ft.
Adjusted rate: £1,743.75/sq.ft.
Cabin price ex GST: £1,046,250
Final price incl 18% GST: £1,234,575

APPROVAL / ENGINEERING BOUNDARY

USER-APPROVED-GA: exact option approved for controlled asset production.
Architectural GA only · not for construction or fabrication.
No structural, lifting, stacking, fire, egress or accessibility claim.
Furniture, sanitary and MEP are excluded unless expressly quoted.
Final mechanism, supports, foundations and services require engineering.

ALL FOUR WALL ELEVATIONS · SAME OPENING LEDGER · FLAT ROOF ENVELOPE

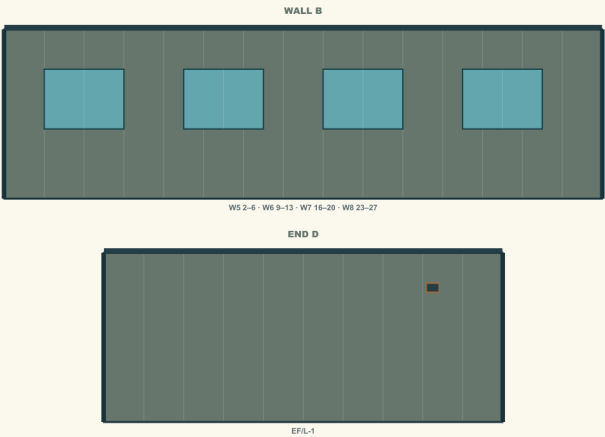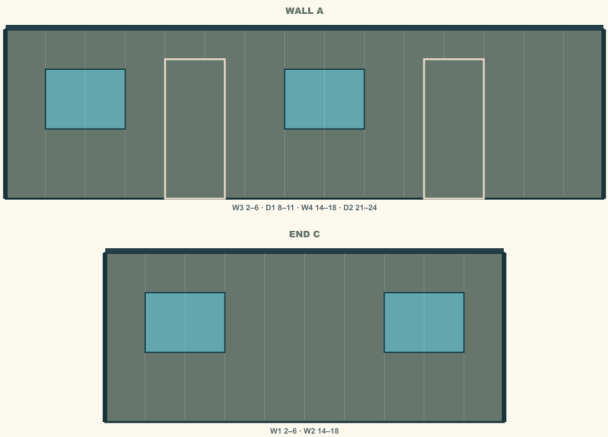

Colour reference: Eucalyptus Grey-Green exterior · Champagne Cream interior · appearance only; final finish follows quotation.

Ruleset 1.0.23 · Source: expandable-container-office-six-size-family.mxd · workbook · user-approved GA

23 AUG 2026 · V1

SAMAN


PORTABLE INFRASTRUCTURE

EXPANDABLE CONTAINER OFFICE

40' × 20' DEPLOYED · ARCHITECTURAL GENERAL ARRANGEMENT

USER-APPROVED-GA
EX-40X20-CORPORATE-EIGHT-DUAL-SERVICE-V1

DIMENSIONED DEPLOYED FLOOR PLAN · ONE COORDINATED MODEL

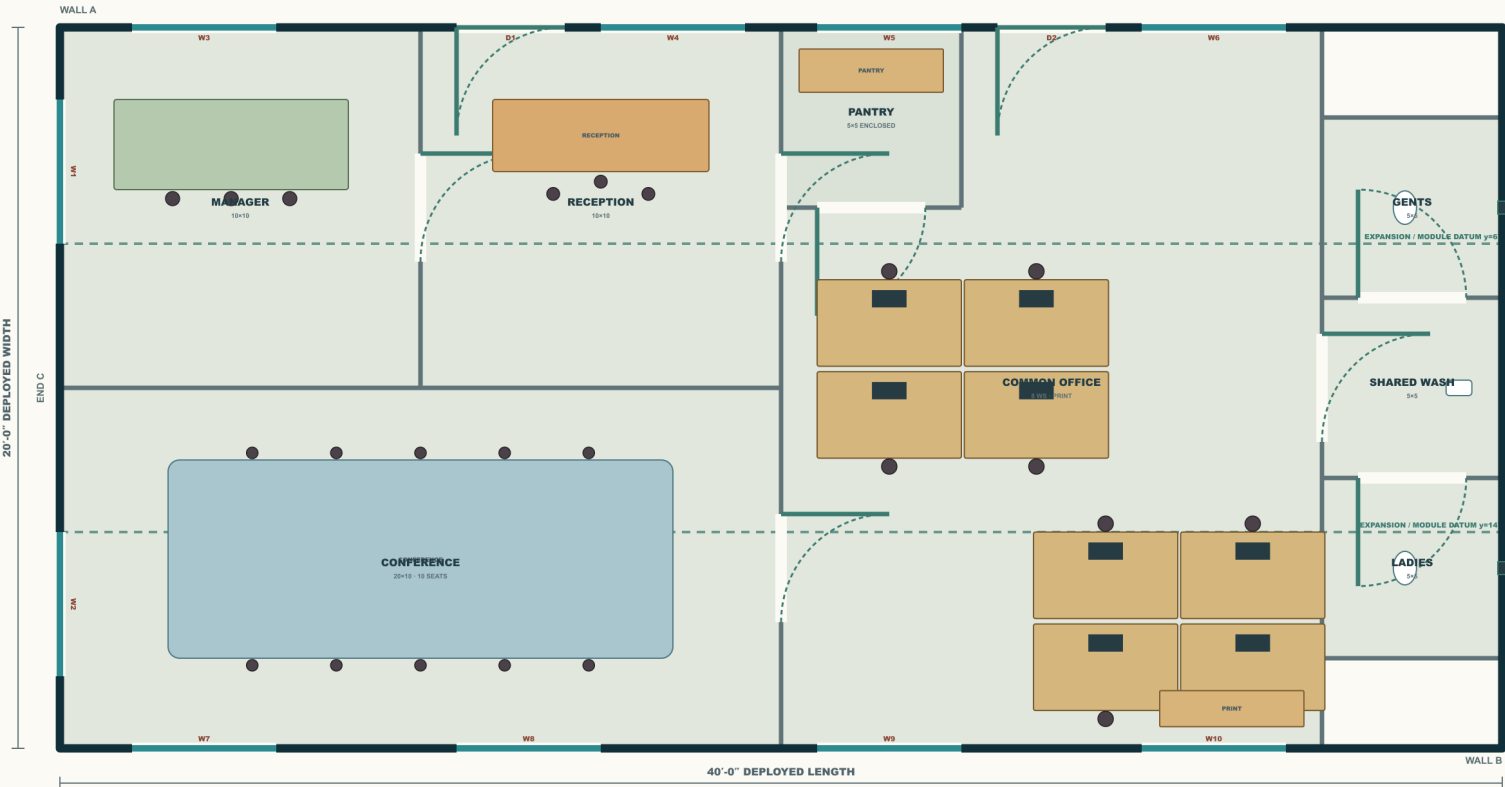

DESIGN CONTROL / CAPACITY / PRICE

40×20 DEPLOYED FT	800 SQ.FT.
8 WORKSTATIONS	2/10 EXT DOORS / WINDOWS

FUNCTIONAL PROGRAM

- Manager + reception + 10-seat conference
- 8 workstations in two 4-seat islands
- Enclosed pantry; separate print point
- Gents/Ladies open only through shared wash

OPENING LEDGER · EXACT ORDER / COORDINATES

WALL A: W3 2-6 · D1 11-14 · W4 15-19 · W5 21-25 · D2 26-29 · W6 30-34
WALL B: W7 2-6 · W8 11-15 · W9 21-25 · W10 30-34
END C: W1 2-6 · W2 14-18
END D: EF/L-1 · EF/L-2

EXPANDABLE-SYSTEM CONTROL

- 20-ft width: 6-ft wing + 8-ft central chassis + 6-ft wing datums.
- 40x40: two 40x20 planning modules joined at y=20 ft.
- Low-profile flat container roof envelope; no gable / hip / cabin slope.
- Furniture clears opening swings and is loose unless quotation says otherwise.
- Folded envelope, hinges, locks, supports and seals: engineering/shop drawing.



WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 800 sq.ft.
Adjusted rate: £1,706.25/sq.ft.
Cabin price ex GST: £1,365,000
Final price incl 18% GST: £1,610,700

APPROVAL / ENGINEERING BOUNDARY

USER-APPROVED-GA: exact option approved for controlled asset production.
Architectural GA only · not for construction or fabrication.
No structural, lifting, stacking, fire, egress or accessibility claim.
Furniture, sanitary and MEP are excluded unless expressly quoted.
Final mechanism, supports, foundations and services require engineering.

ALL FOUR WALL ELEVATIONS · SAME OPENING LEDGER · FLAT ROOF ENVELOPE

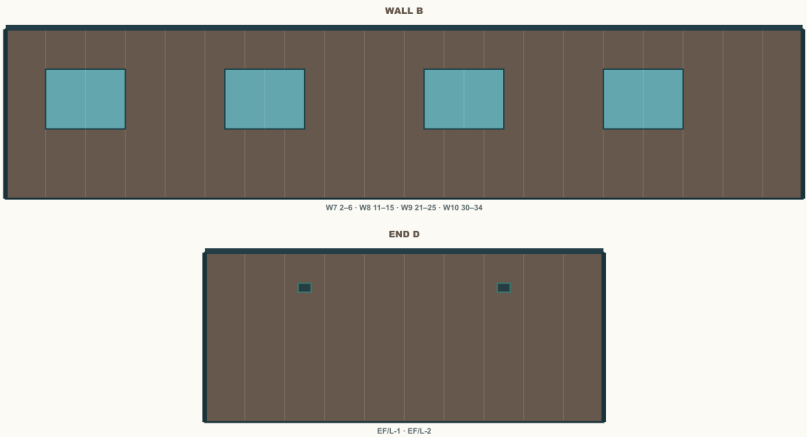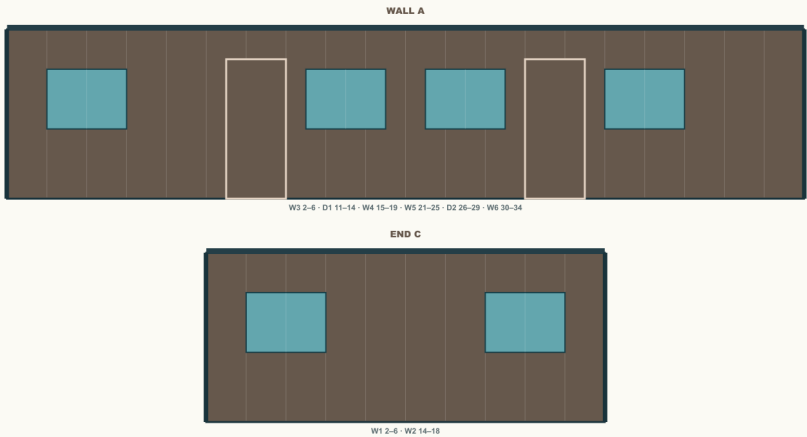

Colour reference: Mineral Bronze exterior · Porcelain Sage interior · appearance only; final finish follows quotation.

Ruleset 1.0.23 · Source: expandable-container-office-six-size-family.mxd · workbook · user-approved GA

23 AUG 2026 · V1

SAMAN


PORTABLE INFRASTRUCTURE

EXPANDABLE CONTAINER OFFICE

40' × 40' DEPLOYED · ARCHITECTURAL GENERAL ARRANGEMENT

USER-APPROVED-GA
EX-40X40-CORPORATE-TWENTYFOUR-SERVICE-V1

DIMENSIONED DEPLOYED FLOOR PLAN · ONE COORDINATED MODEL

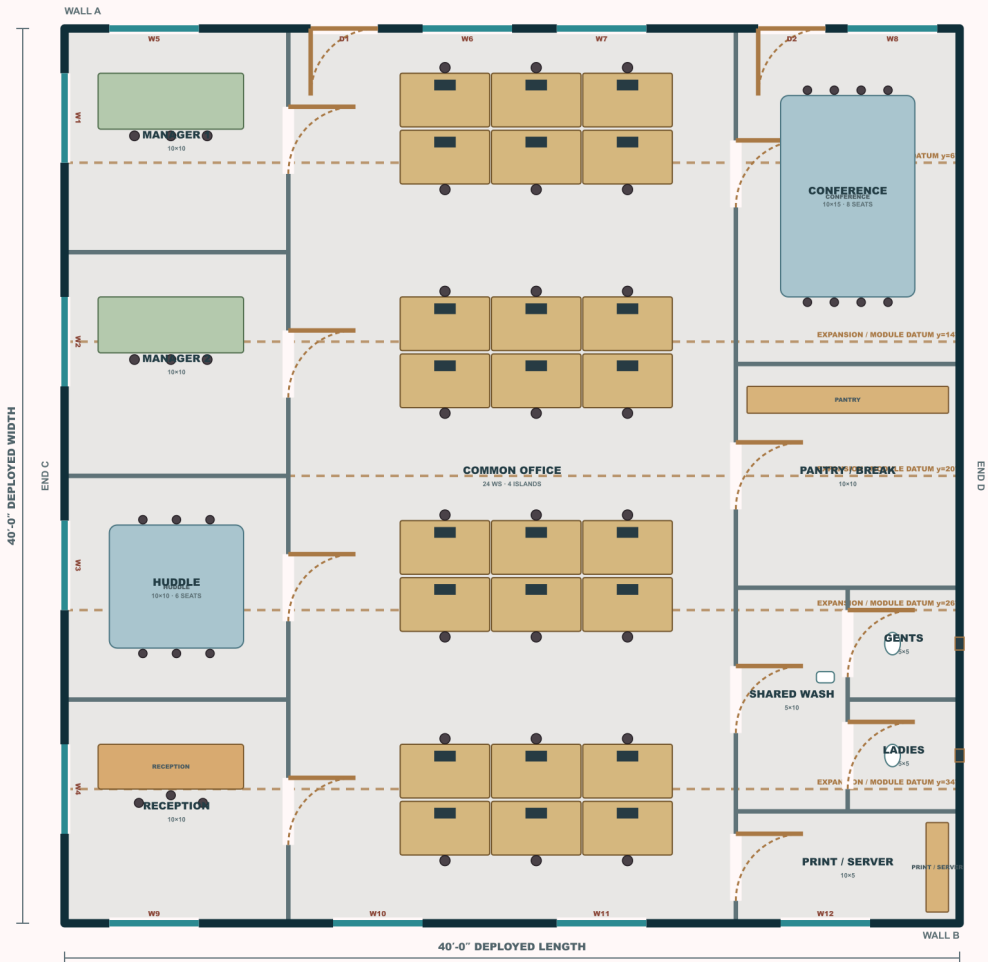

DESIGN CONTROL / CAPACITY / PRICE

40×40 DEPLOYED FT	1600 SQ.FT.
24 WORKSTATIONS	2/12 EXT DOORS / WINDOWS

FUNCTIONAL PROGRAM

- Two managers + huddle + reception
- 24 WS in four exact 3-facing-3 islands
- 8-seat conference + pantry/break
- Shared wash → separate Gents/Ladies

OPENING LEDGER · EXACT ORDER / COORDINATES

WALL A: W5 2-6 · D1 11-14 · W6 16-20 · W7 22-26 · D2 31-34 · W8 35-39
WALL B: W9 2-6 · W10 12-16 · W11 22-26 · W12 32-36
END C: W1 2-6 · W2 12-16 · W3 22-26 · W4 32-36
END D: EF/L-1 · EF/L-2

EXPANDABLE-SYSTEM CONTROL

- 20-ft width: 6-ft wing + 8-ft central chassis + 6-ft wing datums.
- 40×40: two 40×20 planning modules joined at y=20 ft.
- Low-profile flat container roof envelope; no gable / hip / cabin slope.
- Furniture clears opening swings and is loose unless quotation says otherwise.
- Folded envelope, hinges, locks, supports and seals: engineering/shop drawing.



WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 1,600 sq.ft.
Adjusted rate: ₹1,687.50/sq.ft.
Cabin price ex GST: ₹2,700,000
Final price incl 18% GST: ₹3,186,000

APPROVAL / ENGINEERING BOUNDARY

USER-APPROVED-GA: exact option approved for controlled asset production.
Architectural GA only · not for construction or fabrication.
No structural, lifting, stacking, fire, egress or accessibility claim.
Furniture, sanitary and MEP are excluded unless expressly quoted.
Final mechanism, supports, foundations and services require engineering.

ALL FOUR WALL ELEVATIONS · SAME OPENING LEDGER · FLAT ROOF ENVELOPE

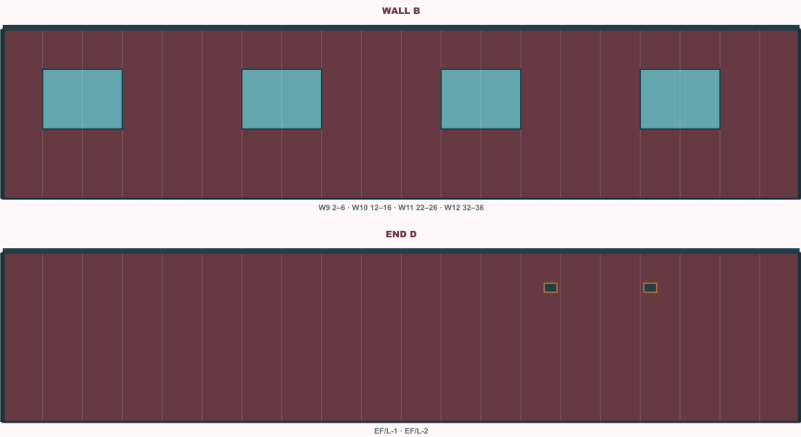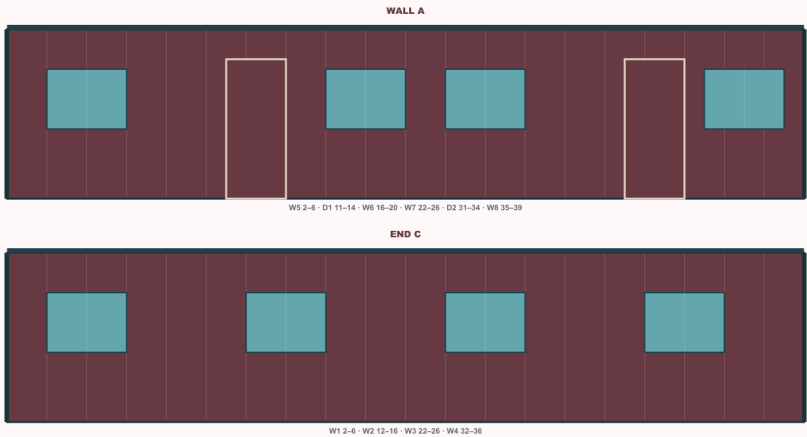

Colour reference: Burgundy Wine exterior · Pearl Grey interior · appearance only; final finish follows quotation.

SAMAN


PORTABLE INFRASTRUCTURE

EXPANDABLE CONTAINER OFFICE

60' × 20' DEPLOYED · ARCHITECTURAL GENERAL ARRANGEMENT

USER-APPROVED-GA
EX-60X20-CORPORATE-EIGHTEEN-SERVICE-V1

DIMENSIONED DEPLOYED FLOOR PLAN · ONE COORDINATED MODEL

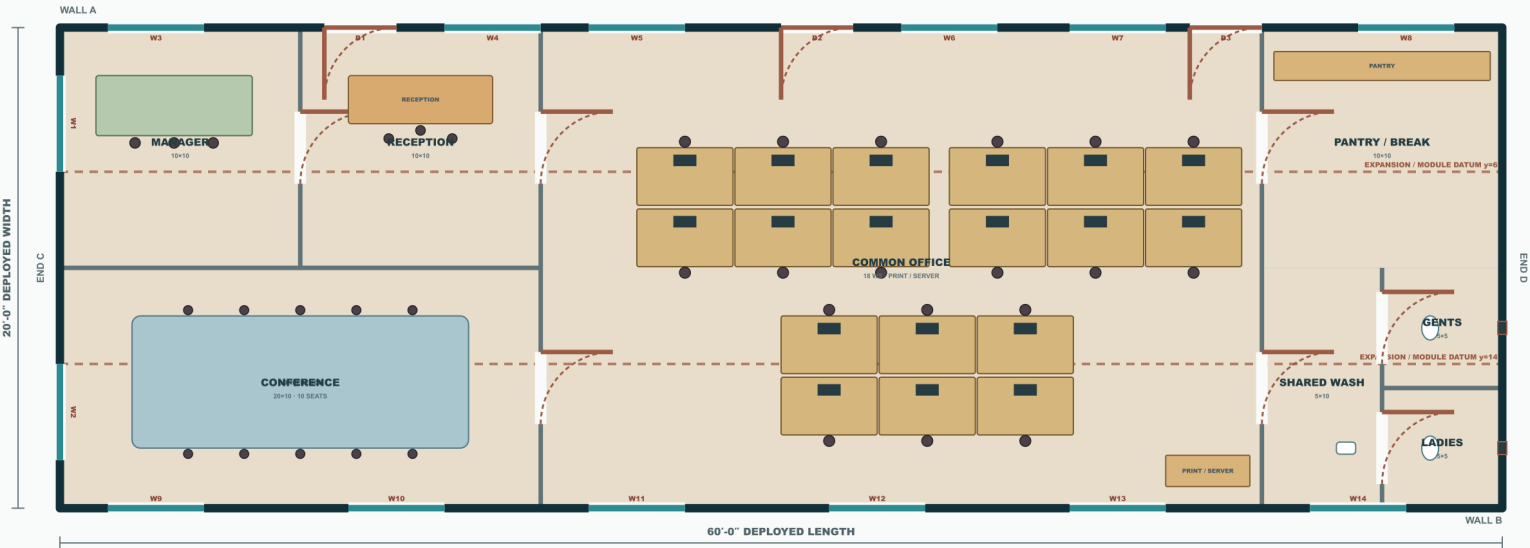

DESIGN CONTROL / CAPACITY / PRICE

60×20 DEPLOYED FT	1200 SQ.FT.
18 WORKSTATIONS	3/14 EXT DOORS / WINDOWS

FUNCTIONAL PROGRAM

- Manager + reception + 10-seat conference
- 18 WS in three exact 3-facing-3 islands
- Pantry/break + print/server
- Shared wash → separate Gents/Ladies

OPENING LEDGER · EXACT ORDER / COORDINATES

WALL A: W3 2-6 · D1 11-14 · W4 16-20 · W5 22-26 · D2 30-33 · W6 35-39 · W7 42-46 · D3 47-50 · W8 54-58
WALL B: W9 2-6 · W10 12-16 · W11 22-26 · W12 32-36 · W13 42-46 · W14 52-56
END C: W1 2-6 · W2 14-18
END D: EF/L-1 · EF/L-2

EXPANDABLE-SYSTEM CONTROL

- 20-ft width: 6-ft wing + 8-ft central chassis + 6-ft wing datums.
- 40x40: two 40x20 planning modules joined at y=20 ft.
- Low-profile flat container roof envelope; no gable / hip / cabin slope.
- Furniture clears opening swings and is loose unless quotation says otherwise.
- Folded envelope, hinges, locks, supports and seals: engineering/shop drawing.



WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 1,200 sq.ft.
Adjusted rate: ₹1,687.50/sq.ft.
Cabin price ex GST: ₹2,025,000
Final price incl 18% GST: ₹2,389,500

APPROVAL / ENGINEERING BOUNDARY

USER-APPROVED-GA: exact option approved for controlled asset production.
Architectural GA only · not for construction or fabrication.
No structural, lifting, stacking, fire, egress or accessibility claim.
Furniture, sanitary and MEP are excluded unless expressly quoted.
Final mechanism, supports, foundations and services require engineering.

ALL FOUR WALL ELEVATIONS · SAME OPENING LEDGER · FLAT ROOF ENVELOPE

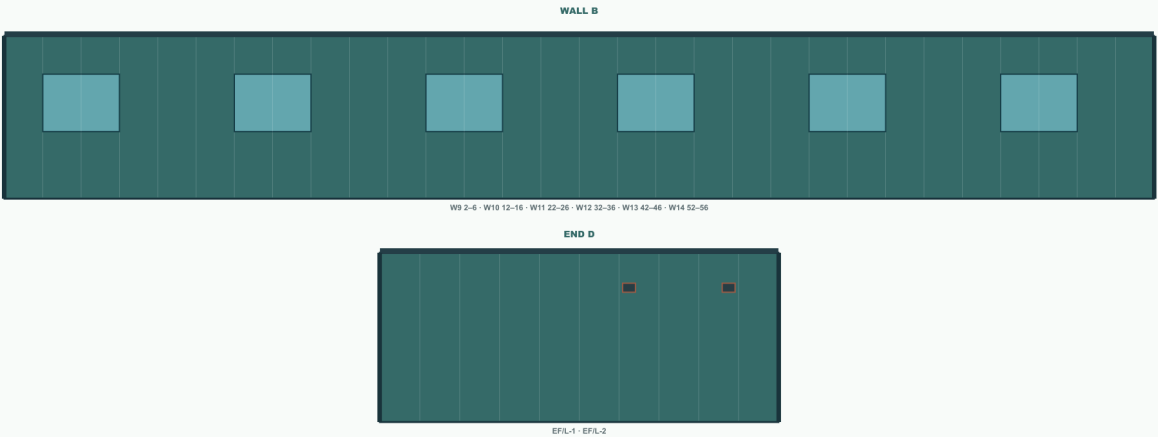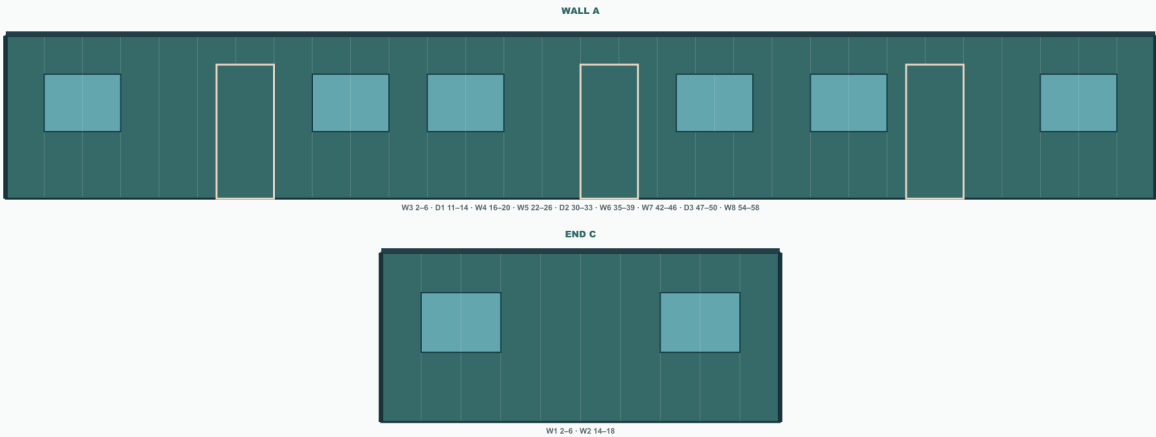

Colour reference: Muted Teal exterior · Almond Beige interior · appearance only; final finish follows quotation.

SAMAN

PORTABLE INFRASTRUCTURE

10×20 FT · APPROVED OPENING + SPACE COORDINATION

EX-10X20-COMPACT-DRY-OFFICE-V1 · USER-APPROVED-GA · DIMENSIONS IN FEET

DIMENSIONED EXTERIOR-OPENING LEDGER

WALL A · D1 3.5–6.5

D1

W1

datum 6'

datum 14'

W2

END C · W1 2–6 · W2 14–18

END D · SOLID

W3

WALL B · W3 3–7

● WINDOW ● EXTERNAL DOOR ● WEATHER LOUVRE

PROGRAM + COMMERCIAL CONTROL

3 + reception
WORKSTATIONS

1 / 3
EXT DOORS / WINDOWS

- Reception task position
- 3 wall workstations
- 4-seat collaboration
- Pantry / print storage
- No sanitary room

WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 200 sq.ft.

Adjusted rate: ₹1,875/sq.ft.

Cabin price ex GST: ₹3,75,000

Incl. 18% GST: ₹4,42,500

Final quotation, logistics and project-specific engineering govern.

Louvre symbols are not-to-scale; final coordinates remain engineering-controlled.

IMMUTABLE GA CONTROL

Openings shown above are the approved coordinates. Realistic images may crop off-frame elements, but must never add, mirror, move or delete a substantially visible opening.

SAMAN

PORTABLE INFRASTRUCTURE

20×20 FT · APPROVED OPENING + SPACE COORDINATION

EX-20X20-MANAGER-MEETING-SIX-V1 · USER-APPROVED-GA · DIMENSIONS IN FEET

DIMENSIONED EXTERIOR-OPENING

WALL A · W3 2-6 · D1 9-12 · W4 14-18

W3

D1

W4

W1

END C · W1 2-6 · W2 14-18

W2

datum 6'

datum 14'

END D · SOLID

W5

W6

W7

WALL B · W5 2-6 · W6 9-13 · W7 14-18

● WINDOW ● EXTERNAL DOOR ● WEATHER LOUVRE

PROGRAM + COMMERCIAL CONTROL

6 + reception
WORKSTATIONS

1 / 7
EXT DOORS / WINDOWS

- 8×8 manager room
- 8×12 six-seat meeting
- 6 workstations; 3 facing 3
- Reception / waiting
- Pantry / print storage

WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 400 sq.ft.

Adjusted rate: ₹1,781.25/sq.ft.

Cabin price ex GST: ₹7,12,500

Incl. 18% GST: ₹8,40,750

Final quotation, logistics and project-specific engineering govern.

Louvre symbols are not-to-scale; final coordinates remain engineering-controlled.

IMMUTABLE GA CONTROL

Openings shown above are the approved coordinates. Realistic images may crop off-frame elements, but must never add, mirror, move or delete a substantially visible opening.


SAMAN

PORTABLE INFRASTRUCTURE

EXPANDABLE CONTAINER OFFICE · 30×20 FT

ENVELOPE + DEPLOYMENT COORDINATION DIAGRAM · EX-30X20-MANAGER-CONFERENCE-EIGHT-SERVICE-V1

WEATHER-SEAL / HINGE DATUM

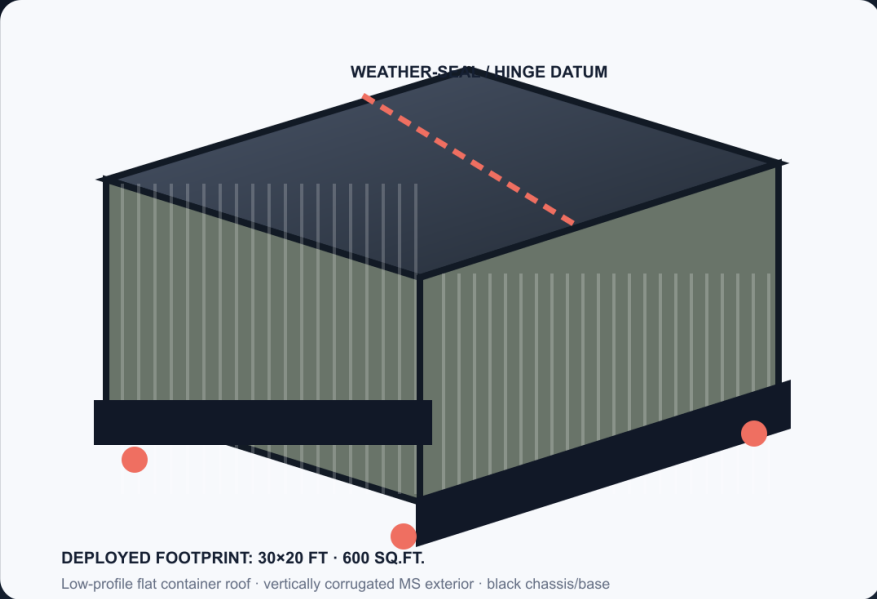

DEPLOYED FOOTPRINT: 30×20 FT · 600 SQ.FT.
Low-profile flat container roof · vertically corrugated MS exterior · black chassis/base

CONTROLLED SYSTEM INTENT

DEPLOYED MODULE LOGIC

6 + 8 + 6 ft deployed width bands

APPROVED OFFICE PROGRAM

• 10×10 manager

• 6-seat conference

• 8 workstations; 2 islands

• Reception + pantry + print

• Wash lobby + one toilet

MATERIAL APPEARANCE CONTROL

1.25–1.6 mm corrugated MS exterior sheet
Vertical ribs only · no plain-wall substitute

COORDINATION BOUNDARY

Concept diagram only. Final hinges, locks, supports, member sizes, foundations, lifting and repeated-deployment criteria follow approved shop drawings and project engineering.

SAMAN

PORTABLE INFRASTRUCTURE

30×20 FT · APPROVED OPENING + SPACE COORDINATION

EX-30X20-MANAGER-CONFERENCE-EIGHT-SERVICE-V1 · USER-APPROVED-GA · DIMENSIONS IN FEET

DIMENSIONED EXTERIOR-OPENING LEDGER

WALL A · W3 2–6 · D1 8–11 · W4 14–18 · D2 21–24

W3

D1

W4

D2

W1

W2

END C · W1 2–6 · W2 14–18

datum 6'

datum 14'

EF/L-1

END D · EF/L-1

W5

W6

W7

W8

WALL B · W5 2–6 · W6 9–13 · W7 16–20 · W8 23–27

● WINDOW

● EXTERNAL DOOR

● WEATHER-SEAL / HINGE DATUM

PROGRAM + COMMERCIAL CONTROL

8 + reception
WORKSTATIONS

2 / 8
EXT DOORS / WINDOWS

• 10×10 manager

• 6-seat conference

• 8 workstations; 2 islands

• Reception + pantry + print

• Wash lobby + one toilet

WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 600 sq.ft.
Adjusted rate: ₹1,743.75/sq.ft.
Cabin price ex GST: ₹10,46,250
Incl. 18% GST: ₹12,34,575

Final quotation, logistics and project-specific engineering govern.
Louvre symbols are not-to-scale; final coordinates remain engineering-controlled.

IMMUTABLE GA CONTROL

Openings shown above are the approved coordinates. Realistic images may crop off-frame elements, but must never add, mirror, move or delete a substantially visible opening.

Architectural / commercial support document · approved GA governs geometry · final project engineering and quotation govern fabrication and supply.

23 AUG 2026 · V1

SAMAN

PORTABLE INFRASTRUCTURE

40×20 FT · APPROVED OPENING + SPACE COORDINATION

EX-40X20-CORPORATE-EIGHT-DUAL-SERVICE-V1 · USER-APPROVED-GA · DIMENSIONS IN FEET

DIMENSIONED EXTERIOR-OPENING LEDGER

WALL A · W3 2-6 · D1 11-14 · W4 15-19 · W5 21-25 · D2 26-29 · W6 30-34

W3

D1

W4

W5

D2

W6

W1

datum 6'

EF/L-1

EF/L-2

datum 14'

W2

W7

W8

W9

W10

WALL B · W7 2-6 · W8 11-15 · W9 21-25 · W10 30-34

● WINDOW

● EXTERNAL DOOR

● WEATHER LOUVRE

PROGRAM + COMMERCIAL CONTROL

8 + reception WORKSTATIONS

2 / 10 EXT DOORS / WINDOWS

- Manager + reception
- 10-seat conference
- 8 workstations; 2 islands
- Enclosed pantry + print
- Dual toilets / shared wash

WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 800 sq.ft.

Adjusted rate: ₹1,706.25/sq.ft.

Cabin price ex GST: ₹13,65,000

Incl. 18% GST: ₹16,10,700

Final quotation, logistics and project-specific engineering govern.

Louvre symbols are not-to-scale; final coordinates remain engineering-controlled.

IMMUTABLE GA CONTROL

Openings shown above are the approved coordinates. Realistic images may crop off-frame elements, but must never add, mirror, move or delete a substantially visible opening.


SAMAN

PORTABLE INFRASTRUCTURE

EXPANDABLE CONTAINER OFFICE · 40×40 FT

ENVELOPE + DEPLOYMENT COORDINATION DIAGRAM · EX-40X40-CORPORATE-TWENTYFOUR-SERVICE-V1

WEATHER-SEAL / HINGE DATUM

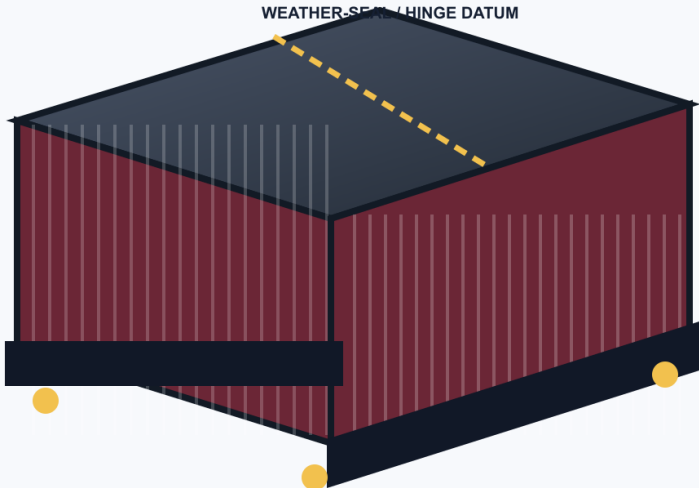

DEPLOYED FOOTPRINT: 40×40 FT · 1,600 SQ.FT.

Low-profile flat container roof · vertically corrugated MS exterior · black chassis/base

CONTROLLED SYSTEM INTENT

DEPLOYED MODULE LOGIC

6 + 8 + 6 | 6 + 8 + 6 ft

APPROVED OFFICE PROGRAM

- 2 managers + huddle
- Reception / waiting
- 24 WS; four 3-facing-3 islands
- Conference + pantry / break
- Print/server + dual service suite

MATERIAL APPEARANCE CONTROL

1.25–1.6 mm corrugated MS exterior sheet

Vertical ribs only · no plain-wall substitute

COORDINATION BOUNDARY

Concept diagram only. Final hinges, locks, supports, member sizes, foundations, lifting and repeated-deployment criteria follow approved shop drawings and project engineering.

SAMAN

PORTABLE INFRASTRUCTURE

40×40 FT · APPROVED OPENING + SPACE COORDINATION

EX-40X40-CORPORATE-TWENTYFOUR-SERVICE-V1 · USER-APPROVED-GA · DIMENSIONS IN FEET

WALL A · W5 2–6 · D1 11–14 · W6 16–20 · W7 22–26 · D2 31–34 · W8 35–39

W5W6W7D2W8

datum 6' datum 14' datum 20' datum 26' datum 34'

W1W2W3W4

END C · W1 2–6 · W2 12–16 · W3 22–26 · W4 32–36

END D · EF/L-1 · EF/L-2

W9W10W11W12

WALL B · W9 2–6 · W10 12–16 · W11 22–26 · W12 32–36

DIMENSIONED EXTERIOR OPENING LEDGER

W1W2W3W4

W5W6W7D2W8

W9W10W11W12

WALL A · W5 2–6 · D1 11–14 · W6 16–20 · W7 22–26 · D2 31–34 · W8 35–39

WALL B · W9 2–6 · W10 12–16 · W11 22–26 · W12 32–36

PROGRAM + COMMERCIAL CONTROL

24 + reception
WORKSTATIONS

2 / 12
EXT DOORS / WINDOWS

• 2 managers + huddle

• Reception / waiting

• 24 WS; four 3-facing-3 islands

• Conference + pantry / break

• Print/server + dual service suite

WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 1,600 sq.ft.

Adjusted rate: ₹1,687.5/sq.ft.

Cabin price ex GST: ₹27,00,000

Incl. 18% GST: ₹31,86,000

Final quotation, logistics and project-specific engineering govern.

Louvre symbols are not-to-scale; final coordinates remain engineering-controlled.

IMMUTABLE GA CONTROL

Openings shown above are the approved coordinates. Realistic images may crop off-frame elements, but must never add, mirror, move or delete a substantially visible opening.

Architectural / commercial support document · approved GA governs geometry · final project engineering and quotation govern fabrication and supply.


23 AUG 2026 · V1

SAMAN

PORTABLE INFRASTRUCTURE

EXPANDABLE CONTAINER OFFICE · 60×20 FT

ENVELOPE + DEPLOYMENT COORDINATION DIAGRAM · EX-60X20-CORPORATE-EIGHTEEN-SERVICE-V1

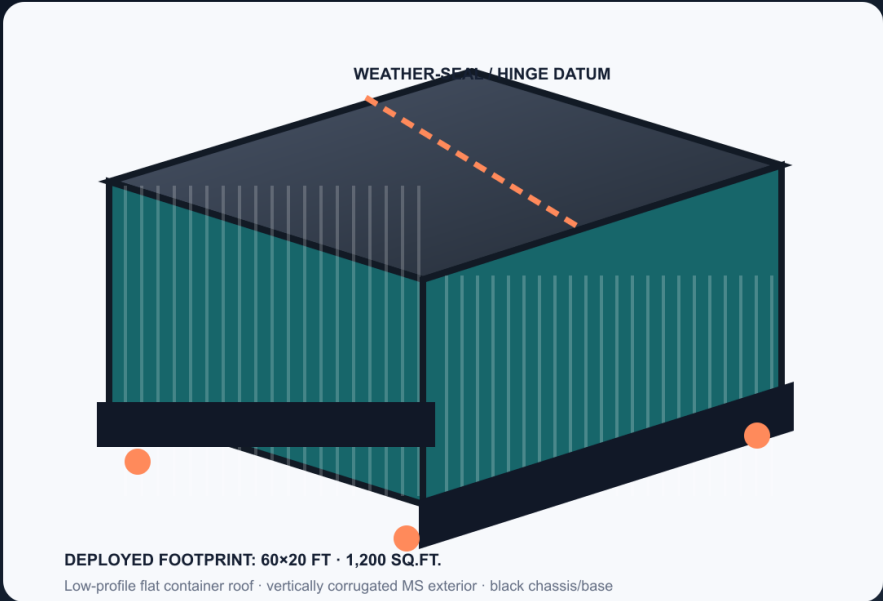

CONTROLLED SYSTEM INTENT

DEPLOYED MODULE LOGIC
6 + 8 + 6 ft deployed width bands

APPROVED OFFICE PROGRAM

- Manager + reception
- 10-seat conference
- 18 WS; three 3-facing-3 islands
- Pantry/break + print/server
- Dual toilets / shared wash

MATERIAL APPEARANCE CONTROL
1.25–1.6 mm corrugated MS exterior sheet
Vertical ribs only · no plain-wall substitute

COORDINATION BOUNDARY


Concept diagram only. Final hinges, locks, supports, member sizes, foundations, lifting and repeated-deployment criteria follow approved shop drawings and project engineering.

SAMAN

PORTABLE INFRASTRUCTURE

60×20 FT · APPROVED OPENING + SPACE COORDINATION

EX-60X20-CORPORATE-EIGHTEEN-SERVICE-V1 · USER-APPROVED-GA · DIMENSIONS IN FEET

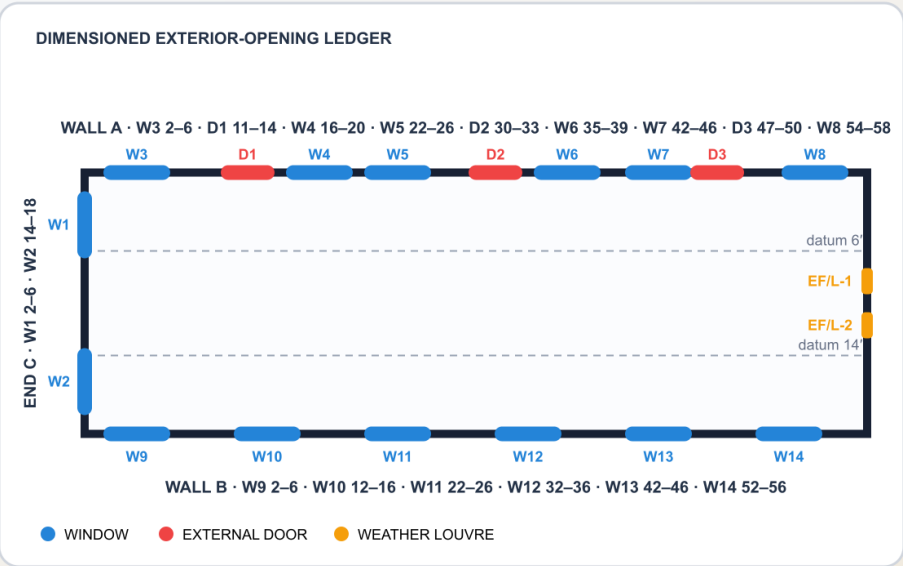

PROGRAM + COMMERCIAL CONTROL

18 + reception WORKSTATIONS
3 / 14 EXT DOORS / WINDOWS

- Manager + reception
- 10-seat conference
- 18 WS; three 3-facing-3 islands
- Pantry/break + print/server
- Dual toilets / shared wash

WORKBOOK PRICE DASHBOARD · BUDGETARY

Deployed area: 1,200 sq.ft.
Adjusted rate: ₹1,687.5/sq.ft.
Cabin price ex GST: ₹20,25,000
Incl. 18% GST: ₹23,89,500
Final quotation, logistics and project-specific engineering govern.
Louvre symbols are not-to-scale; final coordinates remain engineering-controlled.

IMMUTABLE GA CONTROL

Openings shown above are the approved coordinates. Realistic images may crop off-frame elements, but must never add, mirror, move or delete a substantially visible opening.

Core system and material controls

Central transport chassis	Carries folded transport condition and interfaces with deployed floor wings, hinge beams, lock pockets and support points.
Fold-out floor leaves	Insulated steel cassettes with articulated joints and adjustable supports; deployed floor alignment and joint covers require project coordination.
Top / roof system	Central roof spine with wing-lock frame and low-profile flat expandable-container roof envelope; uplift locks and drainage follow engineering.
Wall system	Central posts and fold-out wall leaves with opening frames frozen to the approved GA before fabrication release.
Exterior finish	Premium vertically corrugated MS sheet, 1.25–1.6 mm appearance baseline; smooth or plain-wall website substitution is not accepted.
Weathering	Weather-seal folds, positive locks and trial deployment checks; sealant is not treated as the only alignment or locking control.
Handling	Transport-condition lifting/handling only unless an engineered method states otherwise; deployed supports are not lifting points.
Interior fit-out	Insulated, lined office interior with electrical, flooring, ceiling and furniture scope confirmed in quotation and coordinated to the approved layout.
Factory QA intent	Trial deployment, dimensional check, opening check, lock/seal inspection, coating inspection and dispatch-condition photographic record.

ENGINEERING BOUNDARY

This document does not claim structural adequacy, lifting capacity, stacking capacity, code certification, fire rating, egress compliance or accessibility compliance. Final engineering, foundations, services and fabrication release remain project-controlled.

Included planning basis

INCLUDED PLANNING BASIS

- Deployed office enclosure and mechanism-inclusive planning estimate
- Approved six-size architectural GA family
- Standard fold-out floors, hinge/lock interfaces and weather seals at planning level
- Base electrical interfaces and interior office finish only where expressly quoted
- Workbook-controlled rate bands and 18% GST calculation

EXCLUDED UNLESS QUOTED

- Transport, unloading, craneage and installation unless quoted
- Foundations, support pads and site utilities
- Loose furniture, appliances and specialist systems unless quoted
- Project-specific structural, fire, electrical or statutory certification
- Repeated deployment-cycle validation and site-specific wind restrictions

Pre-order coordination checklist

01 Confirm deployed footprint, access and placement surface.

03 Confirm transport route, unloading and deployment method.

05 Confirm furniture/equipment loads and final quotation scope.

02 Freeze exact option ID and opening ledger.

04 Freeze electrical, plumbing, HVAC and utility-entry locations.

06 Release only signed project shop drawings for fabrication.



SAMAN PORTABLE · EXPANDABLE CONTAINER OFFICE

Final price, lead time, specification and inclusions are confirmed only in the project quotation and signed drawing set.